# **YB-600A(LED)**



# Fail safe electric bolt with european-type cylinder



#### **Product overview**


YB-600A (LED) is an all-metal construction electric bolt with European-type cylinder and has both electric control and manual below zero based on the all-metal parts. The bolt of the lock is made of 304 stainless steel solid bar by CNC lathe, which can withstand 2000kg holding force. With the multiple designs of durable solenoid valve, special photoelectric control system, ultra-low temperature and power consumption design, vandal resistant circuitry and auto-detective circuitry, YB-600A (LED) is widely used in prisons, military armory, bank, database and other heavy duty doors.


Dimer	sions					Unit: mm
		270.00 255.00				
00 gg	• • • • • • • • • • • • • • • • • • •	0	•	Ŵ	0	0
1		220.00				<u> </u>
3.00	] (a)					3.00 48.00
	45.00					28.5
	00.00 00.00 00.00	00				
	22.00	50.00 27.00 \$0.00 \$14.00				

Parameter/Model	YB-600A(LED)				
Parameter	Description				
Fail safe	Unlock when power off				
Dimensions	270Lx30Wx48H (mm)				
Strike	100Lx25Wx3H(mm)				
Bolt	16mmDIA, 304 stainless steel 16mm throw				
Voltage	12VDC				
Start current	1200mA				
Standby current	200mA				
Bolt strength	304 stainless steel with polishing finish, 2000kg holding force				
Suitable for	Wooden door, Heavy door, metal door				
Time delay	0/3/6/9sec				
Signal output	Lock status output, NO/NC/COM(NO/COM door signal output can be customized)				
LED	Light on indicates locked; Light off indicates unlocked				
Induction distance	Within 8mm				
Face place material	304 stainless steel panel with wiredrawing finish				
Weight	1.6kg				

# **Installation dimension** 0 134

#### Installation diagram





Side View

Vertical View



Magnetic Plate





#### Suitable for double action doors


Electric bolts are specially designed for double action doors. They can also be installed on both inswing doors and outswing doors.





# Optional cylinder


Single side or both-side cylinder is available. Other size of cylinders can be customized, 80/90/100/110/120mm.













Single side cylinder





Single side cylinder with Thumb

Specially designed of European-type cylinder with electric control and manual control functions


# Auto-lock time delay

This can be set up from 0 to 9 seconds by adjusting the jumpers.




### **Optional accessory**

The door loop is used for protection of extension wiring from damages for security reasons. (Optional models: DLK-401/402/403)

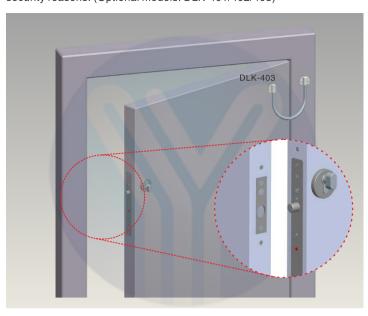


# **Auto-detective circuitry**

This special auto-detective circuit of electric bolt keeps the bolt retracted while the door unlocked or improperly aligned until the door is properly closed.

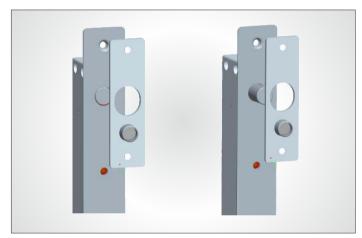


# Vandal resistant circuitry

The reed sensor will automatically disconnect when the door is actually closed in order to enhance the security of the lock.

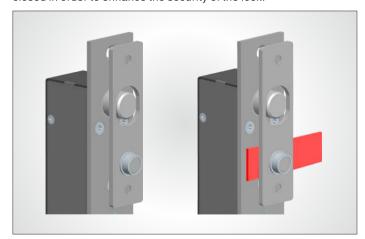


#### Photoelectric sensor control

Instead of using electric components, we use photoelectric components to make the bolt more stable and durable. at the same time, it can increase the lifetime of the electric bolt.

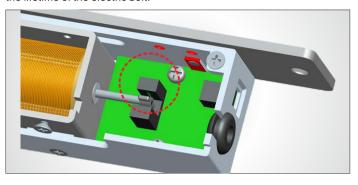


#### Ultra durable solenoid valve

Tested for over 500,000 times, the specially designed solenoid valve can be used for 5 to 10 years.

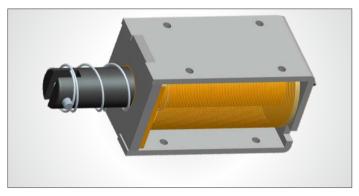


#### All-metal lock body

The all-metal lock body and components make the lock stronger and more durable, which ensure the lock can work under the harsh environment. (Can order the lock work at the temperature of 60 °C or 40 °C below zero.)

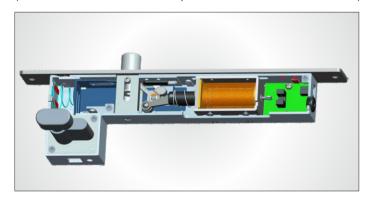

# **Connecting instructions**

With the special auto-detective circuit, we advise you to connect our own open wires to open the door instead of shutting off the power directly.

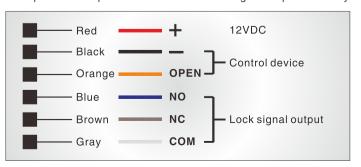


#### Optional door or lock sensor output

Standard option is a set of NO/NC/COM lock signal output contact. (NO/ COM of door signal output contact can be customized, YB-600A (LED)-DS)




#### Optional anti-burglar function

When the bolt is extended, it cannot be retracted by the external force without permission.

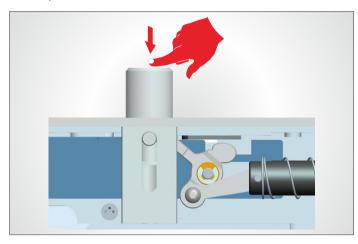

# **Energy saving design**

When the bolt is extended to keep the door locked, it draws only 0.2A in a holding mode down from 1.2A while the bolt is retracted. This design extends the life of the electric bolt.

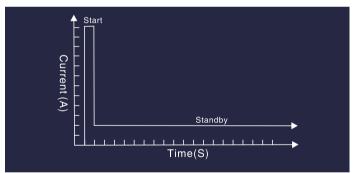

#### 304 stainless steel solid bolt

With 304 stainless steel solid bolt, the electric bolt has 2000kg holding force. It is stronger and more durable under the harsh environment.

